




The smaller models of PLCV5 series, provide a reliable solution for every day needs in offices and homes. Easy to install and accurate in motion require little room inside the false ceiling and offer flexibility in application setup and design with optional drop down ability (increase in number of scissor sets), available at ordering stage.



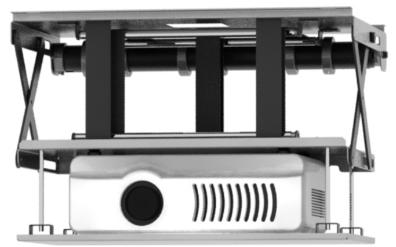

Model	PLCV5.1	PLCV5.1 +XD200	PLCV5.1 +2 x XD200	PLCV5.2	PLCV5.2 +XD200	PLCV5.2 +2 x XD200
Space inside carriage for projector (WxL)	470mm x 440mm			420mm x 440mm		
Maximum load capacity (projector+ceiling cover)	20kg					
Minimum required inner ceiling depth (height)	71mm for projectos with L <345mm or 105mm for projectos with L >345mm +projector height	113mm +projector height	155mm +projector height	71mm for projectos with L <345mm or 105mm for projectos with L >345mm +projector height	113mm +projector height	155mm +projector height
Vertical motion length	200mm	400mm	600mm	200mm	400mm	600mm
Standard color	powder coating in RAL 9005 black					
Power supply	230VAC/50-60Hz					
Standard control option	wall switch over 230VAC/50-60Hz					
Optional controls	RF remote control, dry contacts control box, RS 232/485 control board ports (each one alternative to the other)					